



## Максимальная и резервная выходная мощность

	/	-	50		50		60		60	
LLD95	1500,1800	.	5,9	5,9	7,7	6,2	7,3	7,3	9,4	7,5
		.	6,5	6,5	8,5	6,8	8,1	8,1	10,3	8,3
LLD135	3000	.	10,2	10,2	13,7	11,0				
		.	11,2	11,2	15,8	12,1				
LLD140	1500,1800	.	9,1	9,1	11,9	9,5	11,0	11,0	14,7	11,7
		.	10,0	10,0	13,0	10,4	12,1	12,1	16,1	12,8
LLD190	1500,1800	.	12,0	12,0	16,0	12,8	15,3	15,3	17,5	14,0
		.	13,2	13,2	17,6	14,1	16,8	16,8	19,3	15,4
LLD200	3000	.	15,4	15,4	20,3	16,3				
		.	16,9	16,9	22,4	17,9				
LLD250	1500,1800	.	15,4	15,4	20,0	16,0	19,0	19,0	23,0	18,4
		.	17,0	17,0	22,0	17,6	20,9	20,9	25,3	20,2
LLD275	3000	.	20,9	20,9	28,1	22,5				
		.	23,0	23,0	30,9	24,8				
LLD400	3000	.			39,5	31,6				
		.			43,5	34,8				
LLD410	1500,1800	.			30,0	24,0			36,0	28,8
		.			33,0	26,4			39,6	31,7

ISO 8528-1.

Lister Petter.

: - 1.0; - 0.8

### Напряжение

	, 50	, 50	, 60	, 60
	220 . 230 . 240	380/220 400/230 . 415/240	220/110 230/115 . 240/120	220/127 230/133

2 3

Lister Petter.


### Приблизительный расход топлива

	/	/	
		100%	75%
LLD95	1500	1.9	1.5
	1800	2.3	1.8
LLD135	3000	3.9	3.1
LLD140	1500	2.8	2.2
	1800	3.4	2.7
LLD190	1500	3.8	2.9
	1800	4.6	3.6
LLD200	3000	5.9	4.6
LLD250	1500	4.9	3.7
	1800	6.0	4.6
LLD275	3000	7.8	6.1
LLD400	3000	10.6	8.3
LLD410	1500	8.6	6.3
	1800	10.3	7.4



**Приблизительные размеры**

X .		( )		( )		( )	
Y .		X	Y	X	Y	X	Y
LLD95		1442	1693	715	743	984	1143
LLD135		1442	1693	715	743	984	1143
LLD140		1442	1693	715	743	984	1143
LLD190		1442	1693	715	743	984	1143
LLD200		1442	1693	715	743	984	1143
LLD250		1442	1693	715	743	984	1143
LLD275		1442	1693	715	743	984	11.43
LLD400		1442	1693	715	743	984	11.43
LLD410		Lister Petter					

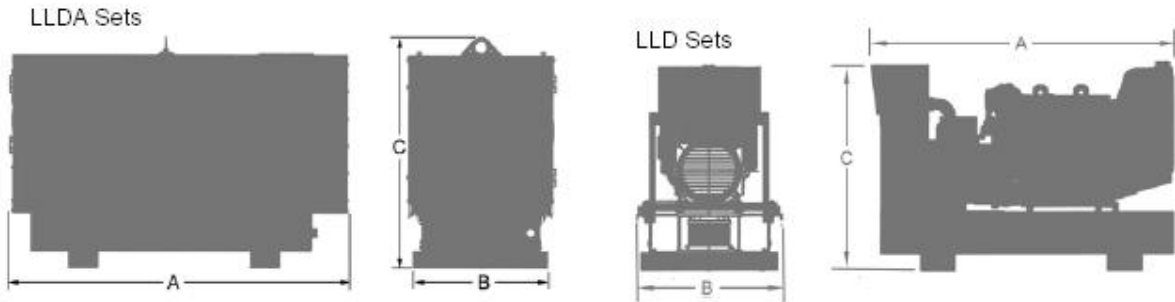

**Адрес представителя**

[www.vir-electric.com.ua](http://www.vir-electric.com.ua)



UK  
 Lister Petter Limited, Dursley, Gloucestershire GL11 4HS England  
 Tel: +44 (0)1453 544141; Fax: +44 (0)1453 546732; E-mail: sales@lister-petter.co.uk <http://www.lister-petter.co.uk>