


# APD 1425 M

Mitsubishi  
Stamford  
D+ &



ISO8528

GC ; ) &



2000/14/EC

&\$\$\$#/#

z) \$ z'z' D:

	"	"	"	"	Amp
400/230	1425,00	1140,00	1290,00	1032,00	1862,00

fDGL

=GC ; ) &

,) & z

fDF DL

z&(

=GC

### Standard Specifications

### ALTERNATOR

### TRANSFER SWITCH

# APD 1425 M

Mitsubishi  
Stamford  
D+' &'



Manufacturer	Mitsubishi		
Model	S12R-PTA		
		% \$ \$' "# "	
		% \$' "	
		0) -) < DQ	
	L	49,03	
	"	170 X 180	
		14:1	
	fl # ı	"# "	1500
	fl ı	L	180,00
		L	335,00
AbsorbedAirDischargeReSourceKey.Text	' # "	98,00	
	' # "	1800	
	° C	258	
		24 V d.c.	
	Load	% \$ \$ı	'+)ı
	# "	) \$ı	
		261,00	195,00 132,00

		Stamford
		PI 734 B
	Hz	50
	"	1400
7cg'		0,80
		3
	fl ı	400/230
	A	2020


		fl ı		fl ı	
	"	"	"	"	L
APD 1425 M	10000	4400	2120	2160	2000
		fl ı		fl ı	
	"	"	"	"	L
AK 96		7500	2300	2500	1500

# APD 1425 M

Mitsubishi  
Stamford  
D+' &'



## 1 D+' &'

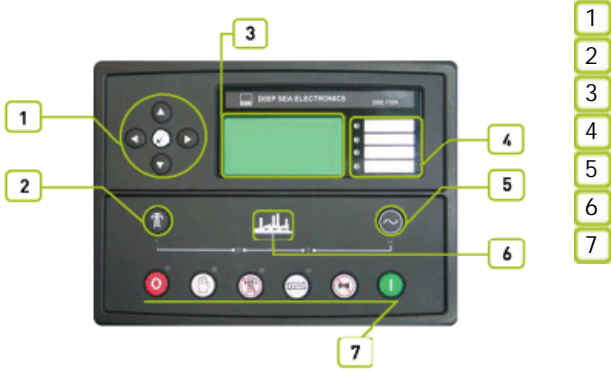

## 2

8G9ž +' &\$ž ) 5ž&&\$#(\$

## 3

## 4

## 5

8G9+' &\$ž &)' ž ž "8G9+' &\$ž 8G9+' &\$ž % &1 '\*(' žFG&' &žFG(,) ž

# APD 1425 M

Mitsubishi  
Stamford  
D+ &



f@#@Bt  
f@#@Bt

"z" "z"

f@#@Bt

971

#

#

#

#

#



6G'9B'\*\$-\$)

6G'9B'\*\$\$\$!\*!&

6G'9B'\*\$\$\$!\*!(

f&)(, t

f&%) +t

f&%) \$t

GA 8

"

%, !&\$

)  
&(\$)

ž

ž

!&(

"

ž

ž

"

"

# APD 1425 M

Mitsubishi  
Stamford  
D+ &



5? - \* !



6

Technical specifications and details for the generator, including dimensions and performance metrics. The text is partially obscured by noise and artifacts.

	"	2300
fl "L	"	7500
fl "L	"	2500
		1500