

APD 1650 M

Mitsubishi
Stamford
D+ &



ISO8528

GC,) &



2000/14/EC

&\$\$#/(#

z) \$ z' z' D:

	"	"	"	"	Amp
400/230	1650,00	1320,00	1500,00	1200,00	2165,00

fDGL

=GC,) &

,) & z

fDF DL

%\$!

%

%&

=GC" \$(*"

z&(

=GC

Standard Specifications

z

fl

!

z

ALTERNATOR

TRANSFER SWITCH

APD 1650 M

Mitsubishi
Stamford
D+' &'



Manufacturer		Mitsubishi		
Model		S12R-PTAA2		
		% \$ \$ ' "# "		
		% (' "		
		%, &< DQ		
	L	49,03		
	"	170 X 180		
		13.5:1		
	fl # ı	"# "	1500	
	fl ı	L	180,00	
		L	317,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	120,00		
fl ' # ı	' # "	1800		
	° C	318		
		24 V d.c.		
	Load	%%\$ı	'+)ı)\$ı
	# "			
		312,00	238,00	157,00

		Stamford		
		PI 734C		
	Hz	50		
	"	1550		
7cg'		0,80		
		3		
	fl ı	400/230		
	A	2237		


		fl ı		fl ı	
	"	"	"	"	L
APD 1650 M	13000	4950	2200	3080	2000
		fl ı		fl ı	
	"	"	"	"	L
AK 99		9000	2800	4800	2000

APD 1650 M

Mitsubishi
Stamford
D+' &'



1 D+' &'

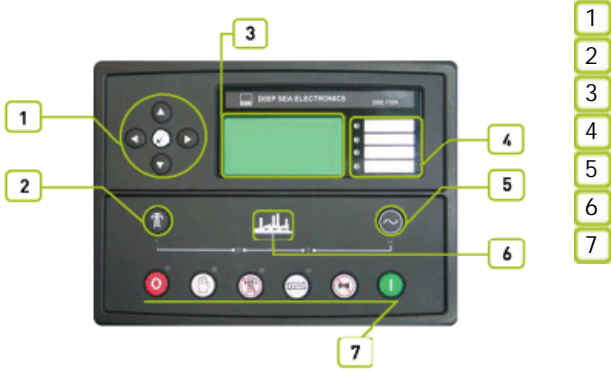

2

8G9ž +' &\$ž) 5ž&&\$#(\$

3

4

5

8G9+' &\$ž &)' \$ ž ž

8G9+' &\$ž 8G9+' &\$ž

% &1 '*('

žFG&' &žFG(,) ž

APD 1650 M

Mitsubishi
Stamford
D+ &



f@#@Bt
f@#@@t

"z" "z" "z"

f@#@Bt

971

#

#

#

#



f&%) +t

f&)(, t

f&%) \$t

6G'9B '*\$-) \$

6G'9B '*\$\$\$!*!&

6G'9B '*\$\$\$!*!(

#



ž

%, !&* \$

)
&(\$)

ž

ž

GA 8

!&(

"

ž

APD 1650 M

Mitsubishi
Stamford
D+' &'



5? -- !'

1

" fl \$\$! '%\$\$' £ ž ž "

1

ž ž ž ž " &\$\$#%/# "

	"	2800
fl "£	"	9000
fl "£	"	4800
		2000