



# AC 880

Cummins  
Mecc Alte  
D+' &'

Manufacturer		Cummins		
Model		QSK 23 G3		
		%\$\$' "# "		
		+*, Z\$\$' "		
		0\$' \$\$\$< DQ		
	L	23,150		
	"	170 x 170		
		16,0:1		
	fl # ı	"# "	1500	
	fl ı	L	103,00	
		L	120,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	53,30		
fl ' # ı	' # "	625,80		
	' # "	147,80		
	° C	543,00		
		24 V d.c.		
	Load	%\$\$ı	'+)ı	)\$ı
	# "			
		161,00	121,00	85,00


		Mecc Alte		
		ECO 43-1SN/4		
	Hz	50		
	"	800,00		
7cg'		0,80		
		3		
	fl ı	400/230		
	A	1154,00		
Temperature		H		

		fl ı		fl ı	
	"	"	"	"	L
AC 880	5950,00	3950,00	1705,00	2225,00	1500,00
		fl ı		fl ı	
	"	"	"	"	L
AK 90	9100,00	6500	2200	2353	850

# AC 880

Cummins  
Mecc Alte  
D+' &'

## 1 D+' &'

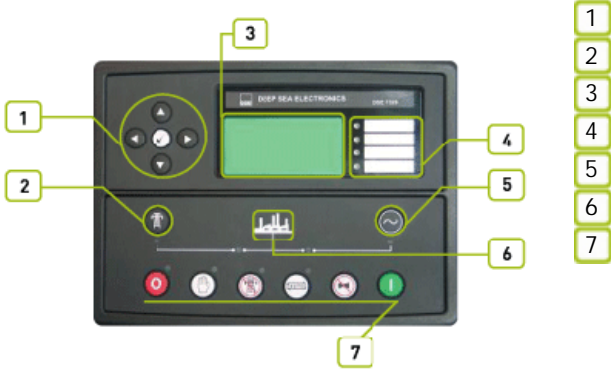

## 2

8G9ž +' &\$ž ) 5ž&&\$#(\$

## 3

## 4

## 5

8G9+' &\$ž &&\$' ž ž "8G9+' &\$' 8G9+' &\$' % &1 \*(' žFG' &žFG(,) ž

# AC 880

Cummins  
Mecc Alte  
D+ &

f@#@Bt  
f@#@!@t

"z" "z" "z"

f@#@Bt

971

#

#

#

#

#

6G'9B'\*\$-\$)'\$

6G'9B'\*\$\$\$!\*!&

6G'9B'\*\$\$\$!\*!(

f&%) +t

f&)(, t

f&% \$t

GA 8

!&+""

%, !&\*(

&(\$)


ž

ž

ž

# AC 880

Cummins  
Mecc Alte  
D+ &''

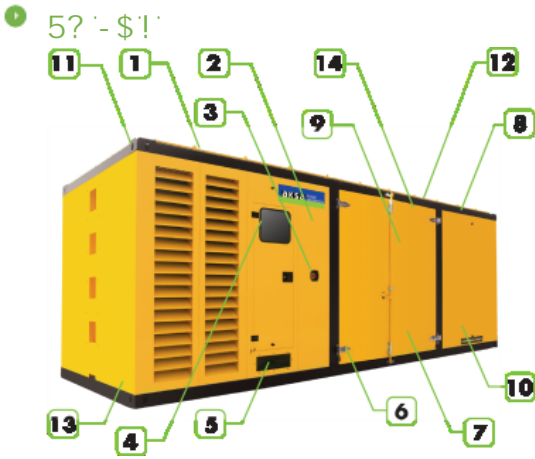

- 1 Steel structure made from steel sheet and steel profiles.
- 2 canopy and panels made from powder coated sheet steel.
- 3 Emergency stop push button.
- 4 Control panel is mounted on the baseframe . Located at the right side of the generator set
- 5 Cable cut locations are under or back of the canopy.
- 6 Corrosion-resistant locks and hinges.
- 7 oil could be drained via valve and a hose
- 8 Exhaust system in the canopy.
- 9 special large access doors (marine type) for easy maintenance
- 10 Fuel tank is at front of the canopy ,easy access to the fuel tank via lockable door
- 11 Lifting points similar to ISO container , located on each top corner of the canopy
- 12 the cap on the canopy provides easy access to radiator cap.
- 13 sound proofing materials
- 14 Integrated ladder built in to side of the canopy allows access to the top of the canopy.

	"	2200
fl "L	"	6500
fl "L	"	2353
	L	850